



PRIMUS DX16 TUMBLE DRYER



DIMENSIONS:

Height: 1625 mm
Width: 800 mm
Depth: 1155mm

CAPACITY:

16kg

IDEAL FOR:



VENDED LAUNDRY



INDUSTRIAL



HEALTHCARE



HOSPITALITY

FEATURES:

- ▶ Electrical or Gas heating
- ▶ Large door opening for easy loading and unloading
- ▶ Galvanized drum
- ▶ Axial airflow
- ▶ Large lint filter
- ▶ Controls:
 - Dual Digital Control or OPL Micro
 - Coin operated version: XQ-Control

OPTIONS:


- ▶ Stainless steel drum
- ▶ Coin operated version
- ▶ Reversing drum
- ▶ Residual moisture control Sensodry+® (only with Full OPL Micro):
 - lower energy and utility costs
 - lower linen replacement costs
- ▶ SafeTech™ Fire Suppression System

ONECARE^{cc} This machine is eligible for our all inclusive service solution, One Care.

DX 16 SPECIFICATIONS

CAPACITY	
Capacity	16kg
Drum Volume	350l
Drum Diameter	
AIRFLOW	
Airflow	280 l/s
DRYING AVERAGE	
Gas Heating	349 g/min
Electric Heating	340 g/min
MOTOR	
Fan	0,4 kW
Drive	0,2 kW
GAS HEATING	
Energy	26,4 kW
Energy	90 kBTU/h
Electrical connection	1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz
Gas Connection	1/2" NPT
STEAM HEATING	
Steam Connection	3/4" NPT
Electrical Connection	1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz
High Pressure 6.9 bar	30.3 kW
High Pressure 6.9 bar	103.4 kBTU/h
ELECTRICAL HEATING	
Energy	24 kW
Electrical connection	1×200-208V/50-60Hz, 3×200-208V/50-60Hz, 1x 230-240V/50-60Hz, 3x 230-240V/50-60Hz, 3x 380V/50-60Hz, 3x400-415V/50-60Hz, 3x 440V/50-60Hz, 3x 460-480V/50-60Hz
EXHAUST	
Exhaust	200 Ø/mm
DIMENSIONS	
Size HxWxD	1625x800x1155 mm
Net Weight (E)	160 kg
Net Weight (G,S)	155 kg

Side DX 16

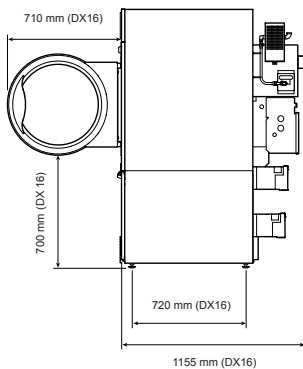

Back DX 16

