



SCHULTHESS STARLINE 7720



DIMENSIONS:

Height: 850mm
Width: 600mm
Depth: 670mm

CAPACITY:

7kg

IDEAL FOR:



PUBLIC SECTOR



HEALTHCARE

FEATURES:

- ▶ Large 4.3" colour display
- ▶ Drum vanes for 3D-Washing
- ▶ LED drum lighting
- ▶ Drum capacity: 60 l
- ▶ Spin speed: 1500 rpm
- ▶ G Factor 605
- ▶ Residual moisture 44%
- ▶ Door opening angle 180°
- ▶ Programme progress and remaining time display
- ▶ 24 freely programmable slots
- ▶ profiClean programme button
- ▶ Favorites for your 6 favourite programmes
- ▶ 35 profiClean programmes for small commercial businesses, building cleaners and special programmes
- ▶ 40–85 °C disinfection programmes Programme groups Sportswear, Businesswear, Home care, Antibac

OPTIONS:

- ▶ Hot water connection
- ▶ Programme expansion module with PC interface
- ▶ Coin box interface
- ▶ Machine plinth in chrome steel, H: 35.5 cm
- ▶ Machine plinth with fluff filter drawer, H: 40 cm
- ▶ Drain valve or drain pump
- ▶ Door hinge right or left


ONECARE[∞] This machine is eligible for our all inclusive service solution, One Care.

**service
Master** 

This machine is compatible with our smart laundry solution, serviceMaster

STARLINE 7720 WASHING MACHINE

| | |
|--|-------------------------------|
| Model with drain pump (P) | 7720.1PU |
| Model with drain valve (V) | 7720.1UV |
| Application features | |
| Load capacity | 7kg |
| Drum capacity | 60l |
| Spinning speed | 1500 rpm |
| g Factor | 605g |
| Residual moisture ¹⁾ | 44% |
| Structural design | |
| Footed appliance with work surface | • |
| Door hinge ³⁾ | r/l/w |
| Dimensions | |
| Height | 85cm |
| Width | 60cm |
| Depth including distance from wall | 67cm |
| Depth with door open (front loader) | 110cm |
| Height (adjustable) | 1cm |
| Weight when empty | 90kg |
| Equipment | |
| Detergent tank and drum | chrome-nickel steel |
| Loading opening | 34cm / 180° |
| Automatic door opening | • |
| Connecting cable | 1.6m |
| Drain: | |
| – Drain hose with benda, only model (P) | 1.5m |
| – Model with drain pump (P) | 21mm |
| – Model with drain valve (V) | 50mm |
| Electric power and water supply | |
| Electrical connection | 400 V 2N~ / 50Hz / 4.6kW 10A |
| Voltage / connected loads /fuse | 230 V 1 N~ / 50Hz / 2.3kW 10A |
| Water connection | |
| – Pressure hose G ¾" with fine filter | 1.5m |
| – Can be connected to cold water hot water | cold water/ hot water 70°C |
| – Water pressure | 1-10 bar |
| Safety and service | |
| Conforms to the European Machinery Directive | 2006/42/EC |
| Country of origin | Switzerland |
| Guarantee | 1 year |
| Service by | Schulthess Maschinen AG |

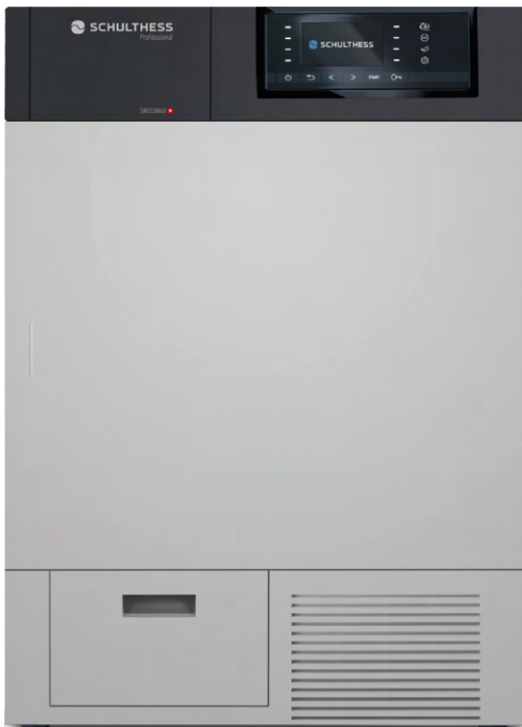

SCHULTHESS STARLINE 7730



DIMENSIONS:

Height: 850mm
Width: 600mm
Depth: 640mm

CAPACITY:

7kg

IDEAL FOR:



PUBLIC SECTOR



HEALTHCARE

FEATURES:

- ▶ Condensation dryer
- ▶ Large 4.3" colour display
- ▶ Stainless steel drum
- ▶ LED drum lighting
- ▶ Drum capacity: 118 l
- ▶ Electronically and time controlled drying programmes
- ▶ Residual moisture measurement
- ▶ Language selection button
- ▶ Excellent noise insulation
- ▶ Crease protection
- ▶ Programme progress and
- ▶ Door opening angle 180° remaining time display

OPTIONS:

- ▶ Door hinge right or left
- ▶ Machine plinth in chrome steel, H: 35,5 cm
- ▶ Stacking kit for washer-dryer tower
- ▶ Coin box interface

ONECARE[∞] This machine is eligible for our all inclusive service solution, One Care.

**service
Master** 

This machine is compatible with our smart laundry solution, serviceMaster

STARLINE 7730 TUMBLE DRYER

| | |
|--|---|
| Product number | 7730.1U |
| Application features | |
| Load capacity | 7kg |
| Structural design | |
| Footed appliance with work surface | • |
| Standard unit for wash and dry column | • |
| Door hinge ³⁾ | r / l / w |
| Dimensions | |
| Height | 85cm |
| Width | 60cm |
| Depth including distance from wall | 64cm |
| Height for built-in installation | 85.5cm |
| Depth with door open | 122cm |
| Height adjustable | 2cm |
| Drying control | |
| By time selection ⁵⁾ | • |
| Automatic by electronic moisture detection ⁶⁾ | • |
| System and equipment | |
| Drying technology | Air condensation system |
| Programme time display | • |
| Load quantity display | • |
| Automatic door opening | • |
| Loading opening | vorne, x 36 / 31cm / 180° |
| LED drum lighting | |
| Connecting cable | 1,5m |
| Outlet hose | 2m / x 22 mm |
| Condensate drainage in container / Drainage direct | • |
| Exhaust line | - |
| Maximum drainage height | 1m |
| Exhaust hose x 100 mm | - |
| Power supply | |
| Electrical connection ⁷⁾ | |
| Voltage | 400 V 2N- / 230 V 1N- |
| Connected values | 2,8 / 2,1 kW |
| Fuse protection | 10 / 10 AT - Machine plinth - Machine plinth with drawer for fluff filter |
| Safety and service | |
| Conforms to the European Machinery Directive | 2006/42/EC |
| Country of origin | Switzerland |
| Guarantee | 1 year |
| Service by | Schulthess Maschinen AG |
| Name and address of supplier | Schulthess Maschinen AG CH-8633 Wolfhausen/ZH |